

PRODUCT DATA

Measurimeter[®] REVOLUTION

FEATURES

Easy To Read Display

- Large LCD display
- Crystal clear in direct sunlight
- Backlight for low light conditions

Rugged Construction

- Weather and moisture proof
- Minimum 5 year battery life
- 3 year Guarantee

Time Saving Features

- Two measuring modes; trip and total
- Pushbutton reset
- Electronic brake
- Telescopic handle
- Mud scraper
- Retractable Stand
- Adds forward subtracts in reverse.



SPECIFICATIONS

Product Dimensions	310.5mm(w) x 1015mm(h) x 180mm(d).
Display	Large LCD display 64mm(w) x 24.55mm(h).
LCD Digit	6 LCD digits, each 6.5mm(w) x 13mm(h).
Backlight	High brightness LED.
Battery Life	Minimum 5 year battery life.
Wheel Circumference	1000mm
Accuracy	±1%
Weight	1200grams
Order No.	5500E METRIC VERSION
Order No.	5505E IMPERIAL & METRIC (AVAILABLE UPON REQUEST ONLY)




TRUMETER
Keep you in control

PATENTED TECHNOLOGY

The new digital *Measurimeter Revolution* from Trumeter, combines advanced and patented technology for the first time to a measuring wheel at costs previously unimaginable. Using the latest electronic design technology, Trumeter have manufactured an electronic distance measuring wheel with more features than ever before.

A precision electronic encoder which has gold plated contacts for durability, converts the rotation of the shaft into a fast and accurate measurement of distance. The on board microprocessor has the ability to apply mathematical calculations to the reading, making it capable of converting metres to yards or feet and inches at the push of a button. This feature is only available on the Imperial & Metric version.

DIMENSIONS

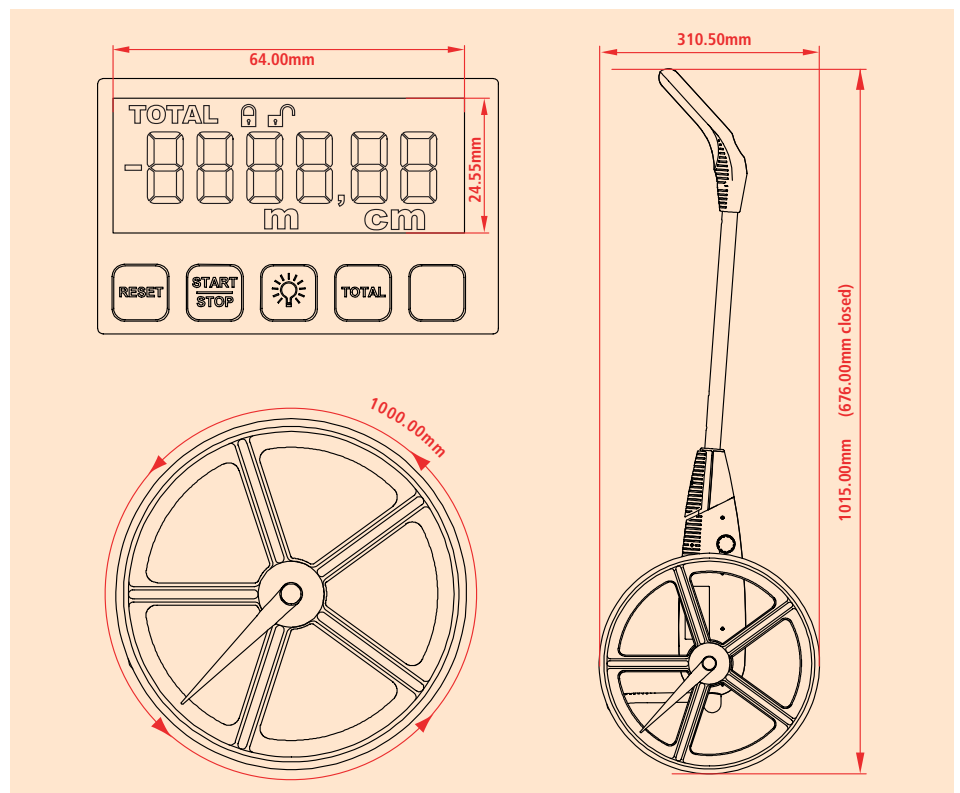

PRODUCT DATA



Measuremeter[®] **REVOLUTION**

Trumeter has been the number one manufacturer of distance measuring wheels for many years and it is through constant innovation, design and improvements like the Measuremeter Revolution, it has and will continue to stay your number one choice for quality, product range and reliability.

Trumeter keeps you in control!